



Tube quick reference

PVC tube
(RoHs compliant)

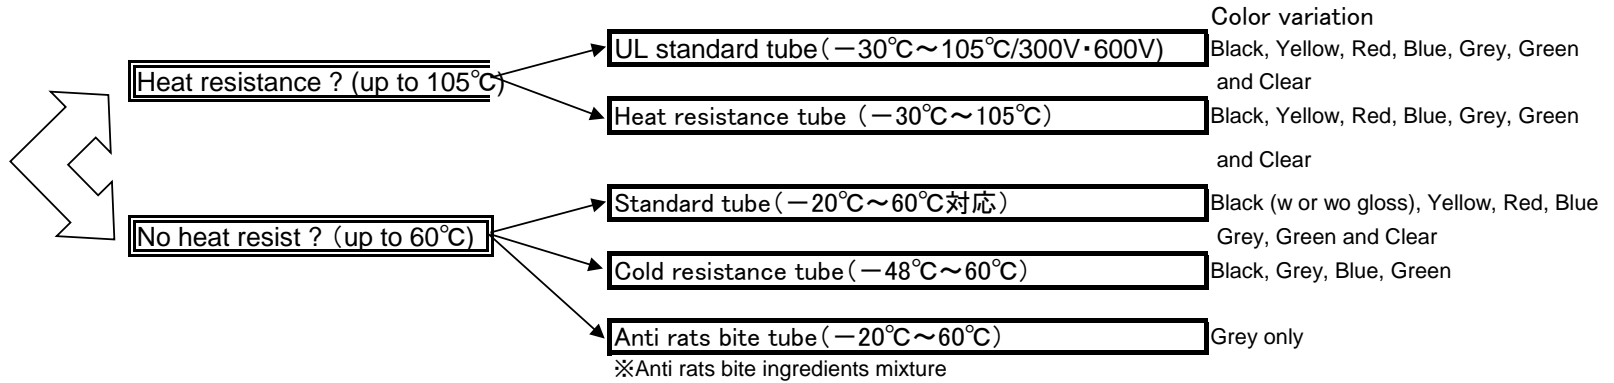

PVC replacement

Non halogen tube
(RoHs・REACH compliant)
※UL standard UL224
105°C×600V certification
※Flame resistance test VW-1 passed
※Electric Appliance and Material Safety Law F-mark acquired

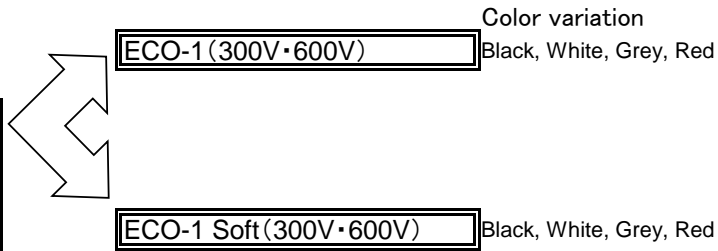

Corrugated tube

Flame resistance (P.P) Continuous use 95°C
Endurance 20000 hours

Non flame resistance (P.P) Continuous use 95°C
Endurance 20000 hours

Heat resistance (Nylon) Continuous use 125°C
Endurance 10000 hours

Anti rats bite (P.P) Continuous use 95°C
Endurance 20000 hours

※Anti rats bite ingredients mixture

Orange corrugate for EV Continuous use 125°C
Heat resistance (Nylon) Endurance 10000 hours

Orange corrugate for EV Continuous use 95°C
Flame resistance (P.P) Endurance 20000 hours

Orange corrugate for EV Continuous use 95°C
Non flame resistance (P.P) Endurance 20000 hours

Corrugated tube size variation
3Φ・5Φ・7Φ・10Φ・13Φ・15Φ
19Φ・22Φ・25Φ・28Φ・32Φ

Color variation
White, Red, Yellow, Light yellow, Orange,
Red orange and Grey

※Anti rats bite corrugated tube is available in grey color only.